

# Technical Data Sheet

## Corona 8



# Technical Data Sheet

## Corona 8



### PRODUCT BENEFITS

- Hanging lamp for illuminating work surfaces
- Flat design with build-in powersupply
- Direct replacment with halogen luminaire is possible
- Housing made of aluminium
- Possible regulation with: DALI, ENOCEAN, 1-10V

### TECHNICAL DATA

#### Electrical data

Input voltage:	230 V AC
Power consumption:	46 W
Efficiency:	> 0,85
PFC:	> 0,90
Life span:	> 50.000 h
Light control:	DALI, EnOcean, 1-10V

#### Optical technical data

LED QTY	24
Luminous flux (4000K):	2554 lm
CCT:	3000K, 4000K, custom*
CRI:	> 80
Luminous efficiency:	70 lm/W
Light angle:	65°, 30°

#### Mechanical data

Operating temperature:	-25°C ~ +40°C
Dimensions:	1150 x 140 x 42 mm
Recessed opening:	/
Weight:	5,0 kg

#### Colour and materials

Colour:	silver, white, black, custom*
Material:	aluminium, metal

#### Certificates and standards

IP protection:	40
Protection class:	class II (safety insulation)

\*Every custom change of product affects the price of product.

### ORDERING INFORMATION


Code	Description
FL05.103.02.00.46	LED CORONA8 46W ALU SILVER 4000K
FL05.103.02.01.46	LED CORONA8 46W ALU SILVER 4000K DALI
FL05.103.02.04.46	LED CORONA8 46W ALU SILVER 4000K EnOcean
FL05.103.01.00.46	LED CORONA8 46W ALU SILVER 3000K
FL05.103.01.01.46	LED CORONA8 46W ALU SILVER 3000K DALI
FL05.103.01.04.46	LED CORONA8 46W ALU SILVER 3000K EnOcean

Manufacturer reserves all rights to make changes in materials and components used it's products. All data are subject to change without prior notification.




### ADDITIONAL PRODUCT DATA

#### Dimensional drawing

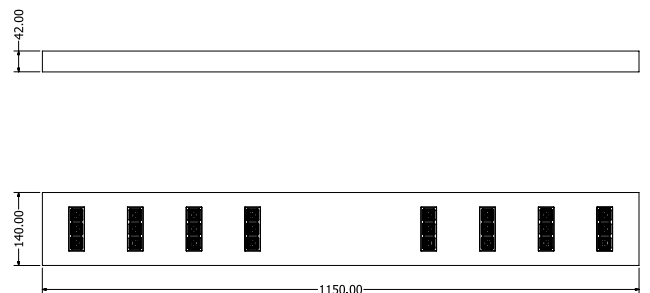

#### Light distribution

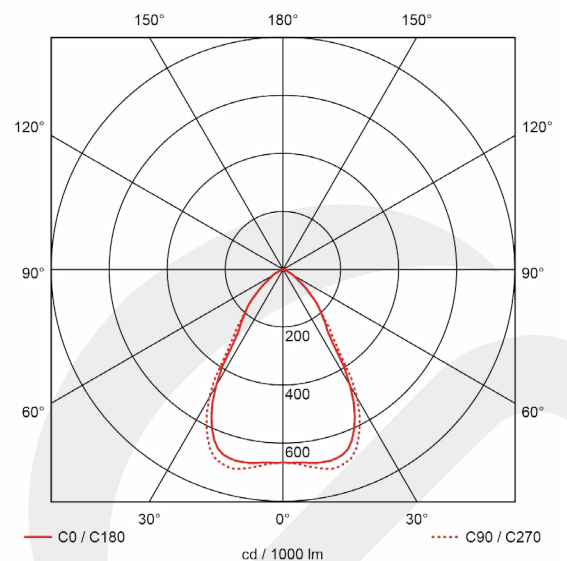

#### FTA d.o.o.

Cesta Leona Dobrotinška 21a  
SI-3230 Šentjur, Slovenia  
Phone: +386 3 746 19 30  
Fax: +386 3 746 19 37  
E-mail: info@fosilum.com