

Driver DC 4X CV DALI

Technical data

Electrical data

Input voltage:	12 - 24V DC
Output voltage:	4 x 12 - 24V DC
Efficiency:	98 %
Output current:	5A max. (limited with fuse)
Communication:	DALI

Mechanical data

Operating temperature:	-25°C ~ +40°C
Dimensions:	106 x 90 x 58 mm
Weight:	185 g


Certificates & standards

IP protection:	IP40, IP65
Protection class insulation	class III (safety insulation)



Additional product data

Input / output connections


- At the entrance we have a single connector with four pins. The first two are used for control outputs 1 and 2. And the other two are used for control outputs 3 and 4.

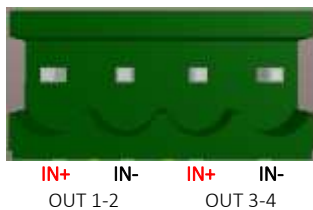

- At the output, we have four connectors and each has 4 pins. The 1-3 and 2-4 are connected together.

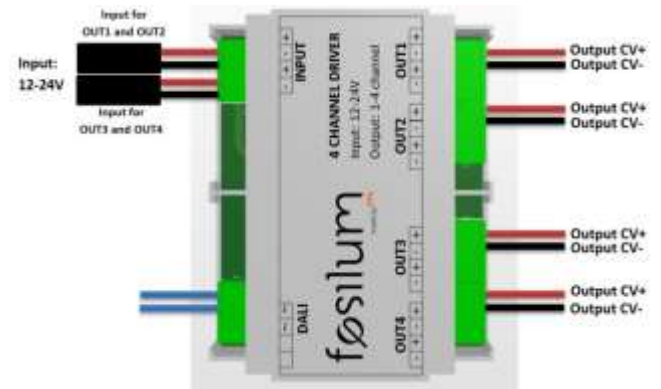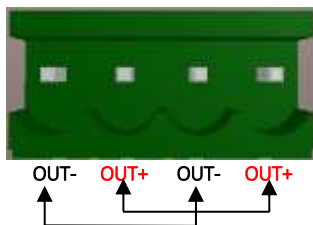

Dimensional drawing

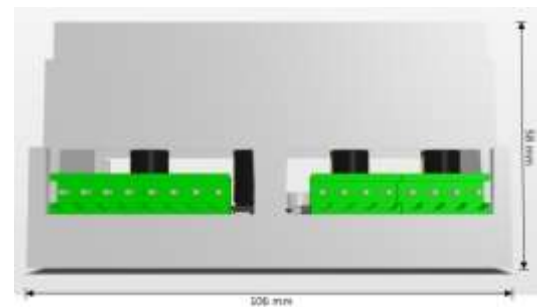

Ordering information

Code	Description
OPTIV *****	OPTIV DC DRIVER 12-24V DALI

Manufacturer reserves all rights to make changes in materials and components used in its products. All data are subject to change without prior notification.

