



- Forma modellabile
- Remarkable form
- Infinite possibilità di design
- Endless design possibilities
- Ottica unica
- Unique optics
- Alternativa base su picchetto regolabile

Based on adjustable stake

Luce LED Ramet | Ramet LED light



Electrical data	Input voltage: AC 230V / 50Hz
	Power consumption: 5 W
	Efficiency: 85%
	PFC: >90
	Life span: >50.000
	Light control: /
Optical technical data	LED QTY: 3
	Luminous flux(4000K,85°C): 340 lm
	Color temperature: 4000K, custom*
	CRI: >80
	Luminous efficacy: 68 lm/W
	Light angle: 270°
Mechanical data	Operating temperature: -25°C ~ +40°C
	Dimensions: /
	Recessed opening: /
	Weight: 3 kg (small) / 7,6 kg (big)
Color and materials	Color: chrome, black
	Material: aluminum
Certificates & standards	IP protection: IP 65
	Protection class insulation: class II (safety insulation)

*Every custom change of product affects the price of product.


Specifiche tecniche | Technical data

Vantaggi del prodotto | Product benefits

- Luce scenografica per interno ed esterno**
Decorative lighting for inside and outside use.
- Ottica singola di puro vetro**
Unique optics from pure glass
- Infinite possibilità di design grazie ai tubi flessibili**
Endless design possibilities with flexible tubes.
- Migliore gestione termica ottimizzata con dissipatore in alluminio**
Great thermal management with optimized aluminium heat sink.
- Sviluppato e realizzato in Europa con 3 anni di garanzia**
Developed and made in Europe with 3 year warranty.

"Come rami leggeri...
i cui boccioli diventano
luciole nella notte..."

"Like light branches ...
whose buds become
fireflies in the night ..."

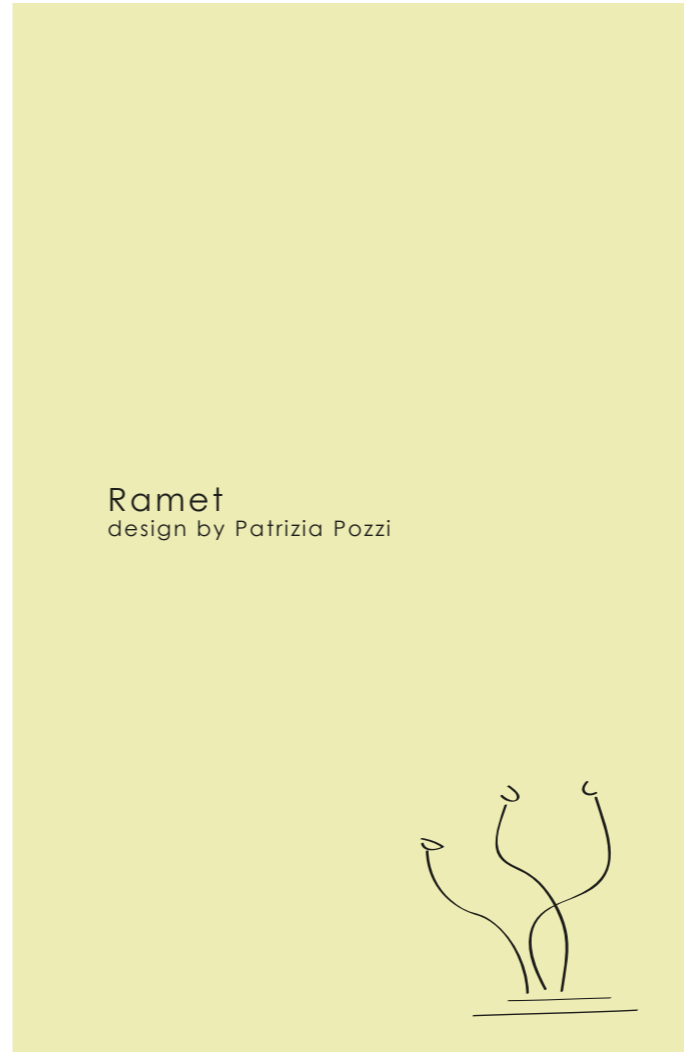

Ramet
design by Patrizia Pozzi

Distributed by:
Fosilumindustrial s.r.l.
fosilumindustrial@fosilumindustrial.com
Via Lovanio 6, 20121 Milano
Manufacturer reserves all rights to make changes in materials and components used its products. All data are subject to change without prior notification.



