



# Prima Duo 2.0 SET

- Energy efficient LED light
- Ceiling-recessed luminaire for general area lighting
- Great thermal management and long life span

## Product benefits

- Ceiling-recessed luminaire for general area lighting
- Optical and thermal design for maximum luminaire efficiency
- Various colour possibilities
- Flexible design concept
- Developed and made in Europe with 5 year warranty.

## Technical data

### Electrical data

Input voltage:	220 – 240 V/50Hz AC
Power consumption:	14 W
Life span:	>50.000
Power supply:	Tridonic LCI 700mA TEC SR

### Optical technical data

LED QTY:	12
Luminous flux (4000K,85°C):	1150 lm
Colour temperature:	2700K, 3000K, 4000K
CRI:	>80
Luminous efficacy:	97 lm/W
Light angle:	65°

### Mechanical data

Operating temperature:	-25°C ~ +40°C
Dimensions:	150 x 150 x 33 mm
Recessed opening:	125 x 100 mm
Weight:	500 g

### Colour and materials

Colour:	white
Material:	metal

### Certificates & standards

IP protection:	IP 40
Protection class insulation	class II (safety insulation)

\*Every custom change of product affects the price of product.

## Ordering information


Code	Description
FL DUO2.01	LED SET PRIMADUO 2.0 METAL WHITE 2700K ND
FL DUO2.02	LED SET PRIMADUO 2.0 METAL WHITE 3000K ND
FL DUO2.03	LED SET PRIMADUO 2.0 METAL WHITE 4000K ND

Manufacturer reserves all rights to make changes in materials and components used its products. All data are subject to change without prior notification.



## Additional product data

### Dimensional drawing

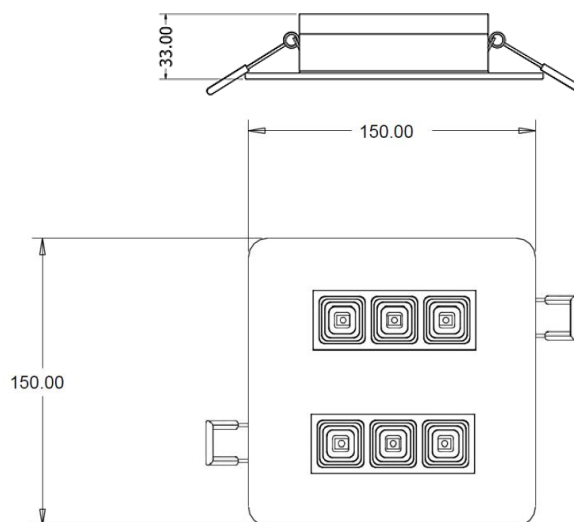

### Light distribution

