


Technical Data Sheet

Corona 6

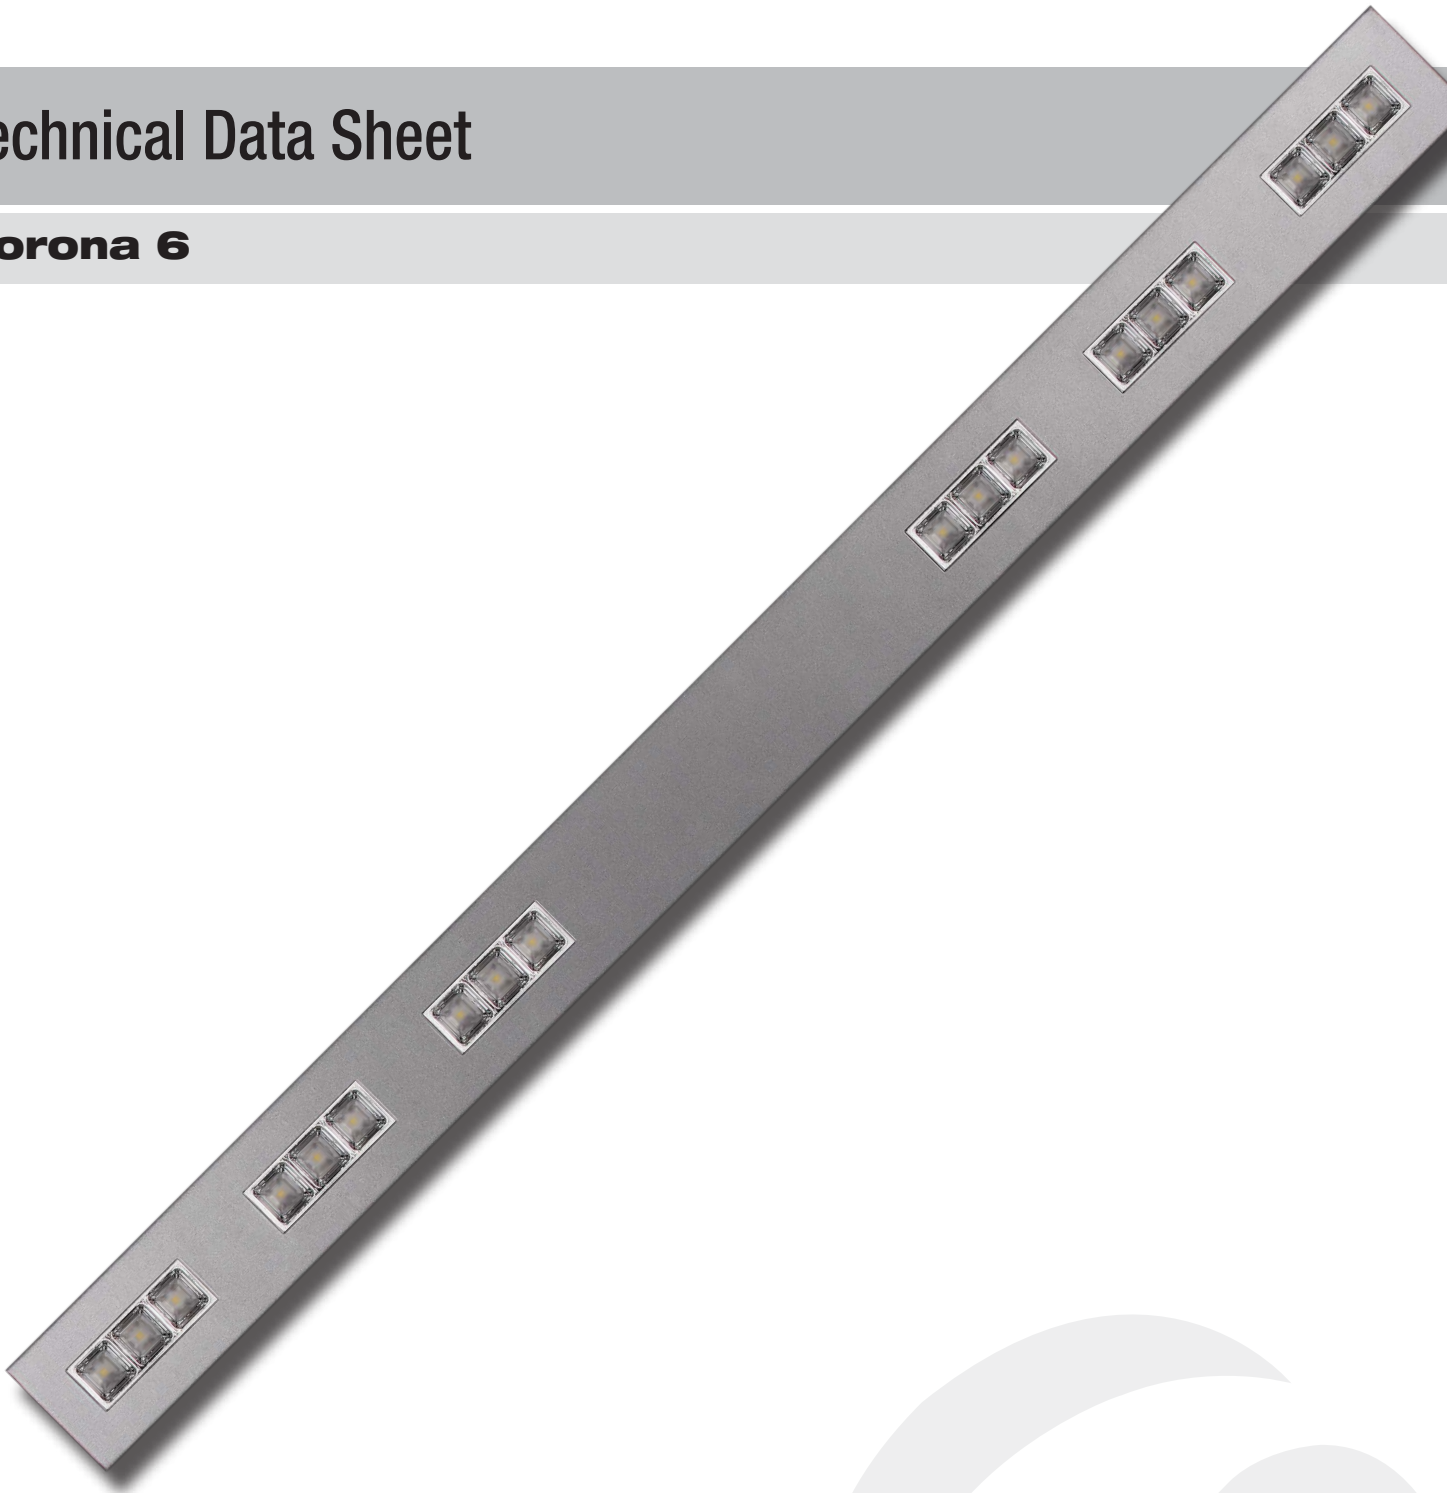

Technical Data Sheet

Corona 6

PRODUCT BENEFITS

- Hanging lamp for illuminating work surfaces
- Flat design with build-in powersupply
- Direct replacment with halogen luminaire is possible
- Housing made of aluminium
- Possible regulation with: DALI, ENOCEAN, 1-10V

TECHNICAL DATA

Electrical data

Input voltage:	230 V AC
Power consumption:	35 W
Efficiency:	> 0,85
PFC:	> 0,90
Life span:	> 50.000 h
Light control:	DALI, EnOcean, 1-10V

Optical technical data

LED QTY	18
Luminous flux (4000K):	1916 lm
CCT:	3000K, 4000K, custom*
CRI:	> 80
Luminous efficiency:	70 lm/W
Light angle:	65°, 30°

Mechanical data

Operating temperature:	-25°C ~ +40°C
Dimensions:	1025 x 80 x 42 mm
Recessed opening:	/
Weight:	4,0 kg

Colour and materials

Colour:	silver, white, black, custom*
Material:	aluminium, metal

Certificates and standards

IP protection:	40
Protection class:	class II (safety insulation)

*Every custom change of product affects the price of product.

ORDERING INFORMATION


Code	Description
FL05.103.02.00.35	LED CORONA6 35W ALU SILVER 4000K
FL05.103.02.01.35	LED CORONA6 35W ALU SILVER 4000K DALI
FL05.103.02.04.35	LED CORONA6 35W ALU SILVER 4000K EnOcean
FL05.103.01.00.35	LED CORONA6 35W ALU SILVER 3000K
FL05.103.01.01.35	LED CORONA6 35W ALU SILVER 3000K DALI
FL05.103.01.04.35	LED CORONA6 35W ALU SILVER 3000K EnOcean

Manufacturer reserves all rights to make changes in materials and components used it's products. All data are subject to change without prior notification.




ADDITIONAL PRODUCT DATA

Dimensional drawing

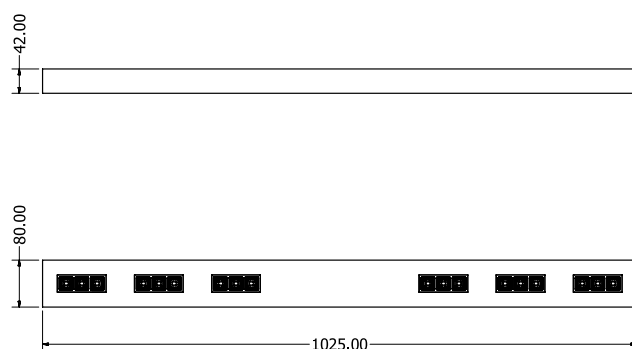

Light distribution

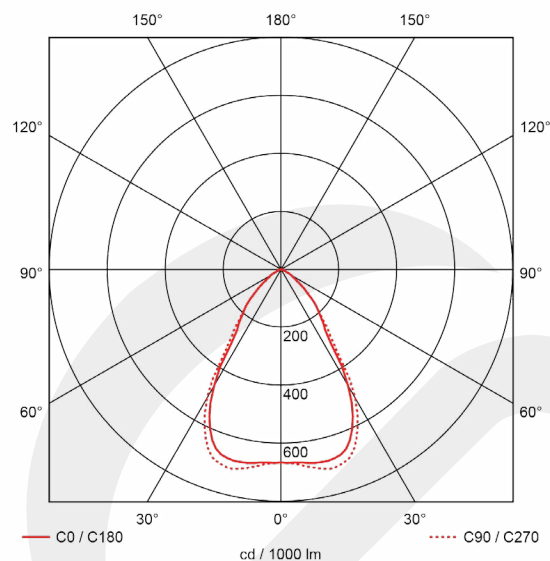

FTA d.o.o.

Cesta Leona Dobrotiška 21a
 SI-3230 Šentjur, Slovenia
 Phone: +386 3 746 19 30
 Fax: +386 3 746 19 37
 E-mail: info@fosilum.com